

SUPERCritical CPD MEMS DRYER FOR 6" WAFERS

AUTOMEGASAMDRI®-915B, SERIES B

tousimis



- The Supercritical **Automegasamdri®-915B, Series B** System was developed by Dr. A. J. Tousimis and our team of long-standing associates within the tousimis® SAMDRI design group.
- Smooth operation and precise control are the Supercritical **Automegasamdri®-915B's** trademark; wafer holders and inserts are provided that allow anti-stiction processing up to 5 pieces of either 6", 4", 3", 2" wafers or 10mm square die per process run!

Tel: 301.881.2450 Fax: 301.881.5374

trc@tousimis.com • www.tousimis.com

© 2011 **tousimis**

FEATURES



- Clean room static-free compatible design.
- Microprocessor controller allows for complete automatic processing.*
- All internal surfaces are inert to CO₂ and ultrapure alcohols.*
- Repeatable operating parameters insuring reproducibility of results.*
- LED's instantly indicate process mode at a glance.*
- Integrated temperature controls.*
- Processes up to 5 x 6" diam. wafers per run; comes with additional HF compatible wafer holders to process 5 x 4", 5 x 3", 5 x 2" diameter wafers or 5 x 10mm square die (tousimis® HF compatible Wafer Holders* can be used to transport and process your wafers and die from HF).
- All electronic components meet CE, UL and/or U.S. Military Specifications.
- Internal rupture disc built in for safety.*
- Static pressure control module pre-set for automatic safe pressure stability.
- An efficient adiabatic cooling system*, capable of cooling the chamber from ambient room temperature to near 0°C, in less than 3 minutes, maintains temperature automatically during both FILL and PURGE modes.*
- For added safety and convenience, U.S. Patented SOTER™ Condenser* quietly captures exhaust and alcohols.
- Under-lit chamber with viewing window facilitates operator chamber status viewing.
- 0.4µm internal filtration system delivers clean filtered LCO₂ to process chamber.*
- Unique chamber inserts* allow variance of chamber I.D. This maximizes efficiency in LCO₂ consumption and processing time.
- On-site Start-up and User(s) Training by a qualified tousimis® technician included.**

SPECIFICATIONS

- Cabinet: 14.25" (36.2cm) Width x 11.75" (29.8cm) Height x 25" (63.5cm) Length
- System Set-Up Area Required: 42" (107cm) Width x 30" (76cm) Depth.
- Chamber size: 6.50" I.D. x 1.25" Depth. Chamber Volume: 679 ml
- Temperature gauge range: -30°C to 60°C, Pressure gauge range: 0 to 2,000psi
- 120V/50-60Hz (Other voltage units also available. Please Inquire)
- LCO₂ flow is controlled through Micro Metering Valves with Vernier handles for easily controlled flow rates.*

STANDARD ACCESSORIES

- LCO₂ High Pressure braided stainless steel inert Teflon® lined hose. 10ft (~3m) long for clean room operation (at a nominal charge, other lengths available upon request).
- LCO₂ External Filter Combination Assembly (#8784) for water/oil/particulates (down to 0.5µm) pre-installed onto the chamber supply LCO₂ high-pressure hose.
- New SOTER™ Condenser* connects to exhaust hose. Captures all alcohol and deadens exhaust noise.*
- Static free Exhaust Tubing for all exhaust outlets.
- Internal stainless and nickel scintered filtration systems incorporated to protect lines, wafers, and valves down to 0.4µm.
- Spare Chamber O-ring (3), Chamber Lamps (2), and 5A Slo-Blow Fuses (2).
- 4 Chamber Inserts.* Enables original chamber ID reduction down to smaller chamber ID sizes for a range including: 6", 4", 3", 2", and 1.25" !
- 6", 4", 3", 2" diameter Wafer Holders and 10mm square die holders included. Holders are HF compatible and can hold up to 5 wafers or die each.
- Free lifetime technical support consultation by our scientific staff.
- 2 year warranty on all parts and labor.

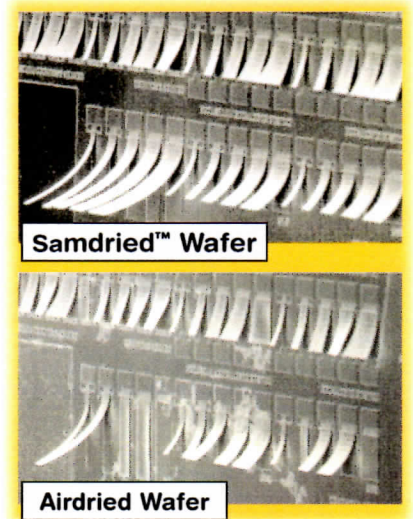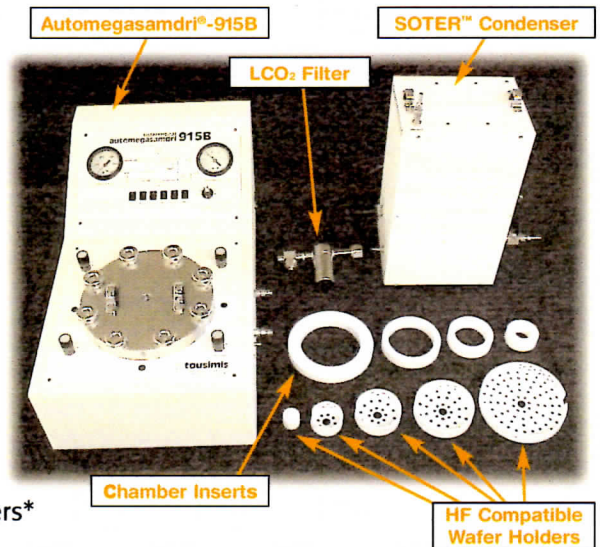

* Most Automegasamdri® feature U.S. patents (# 6,493,964, #6,678,968) or patents pending.

** Available for most countries. Contact tousimis® for details.

Note: Actual delivered model or accessories may vary slightly, as advancements are being constantly applied.

FEATURES



- Clean room static-free compatible design.
- Microprocessor controller allows for complete automatic processing.*
- All internal surfaces are inert to CO₂ and ultrapure alcohols.*
- Repeatable operating parameters insuring reproducibility of results.*
- LED's instantly indicate process mode at a glance.*
- Integrated temperature controls.*
- Processes up to 5 x 6" diam. wafers per run; comes with additional HF compatible wafer holders to process 5 x 4", 5 x 3", 5 x 2" diameter wafers or 5 x 10mm square die (tousimis® HF compatible Wafer Holders* can be used to transport and process your wafers and die from HF).
- All electronic components meet CE, UL and/or U.S. Military Specifications.
- Internal rupture disc built in for safety.*
- Static pressure control module pre-set for automatic safe pressure stability.
- An efficient adiabatic cooling system*, capable of cooling the chamber from ambient room temperature to near 0°C, in less than 3 minutes, maintains temperature automatically during both FILL and PURGE modes.*
- For added safety and convenience, U.S. Patented SOTER™ Condenser* quietly captures exhaust and alcohols.
- Under-lit chamber with viewing window facilitates operator chamber status viewing.
- 0.4µm internal filtration system delivers clean filtered LCO₂ to process chamber.*
- Unique chamber inserts* allow variance of chamber I.D. This maximizes efficiency in LCO₂ consumption and processing time.
- On-site Start-up and User(s) Training by a qualified tousimis® technician included.**

SPECIFICATIONS

- Cabinet: 14.25" (36.2cm) Width x 11.75" (29.8cm) Height x 25" (63.5cm) Length
- System Set-Up Area Required: 42" (107cm) Width x 30" (76cm) Depth.
- Chamber size: 6.50" I.D. x 1.25" Depth. Chamber Volume: 679 ml
- Temperature gauge range: -30°C to 60°C, Pressure gauge range: 0 to 2,000psi
- 120V/50-60Hz (Other voltage units also available. Please Inquire)
- LCO₂ flow is controlled through Micro Metering Valves with Vernier handles for easily controlled flow rates.*

STANDARD ACCESSORIES

- LCO₂ High Pressure braided stainless steel inert Teflon® lined hose. 10ft (~3m) long for clean room operation (at a nominal charge, other lengths available upon request).
- LCO₂ External Filter Combination Assembly (#8784) for water/oil/particulates (down to 0.5µm) pre-installed onto the chamber supply LCO₂ high-pressure hose.
- New SOTER™ Condenser* connects to exhaust hose. Captures all alcohol and deadens exhaust noise.*
- Static free Exhaust Tubing for all exhaust outlets.
- Internal stainless and nickel scintered filtration systems incorporated to protect lines, wafers, and valves down to 0.4µm.
- Spare Chamber O-ring (3), Chamber Lamps (2), and 5A Slo-Blow Fuses (2).
- 4 Chamber Inserts.* Enables original chamber ID reduction down to smaller chamber ID sizes for a range including: 6", 4", 3", 2", and 1.25" !
- 6", 4", 3", 2" diameter Wafer Holders and 10mm square die holders included. Holders are HF compatible and can hold up to 5 wafers or die each.
- Free lifetime technical support consultation by our scientific staff.
- 2 year warranty on all parts and labor.

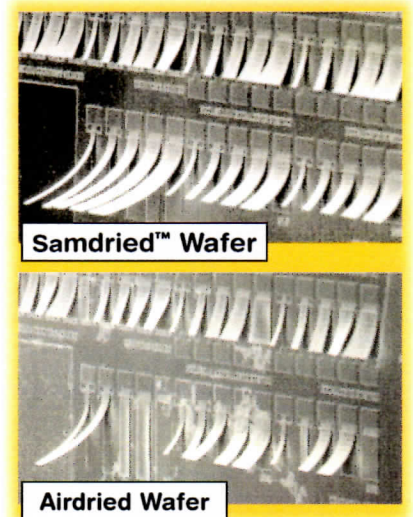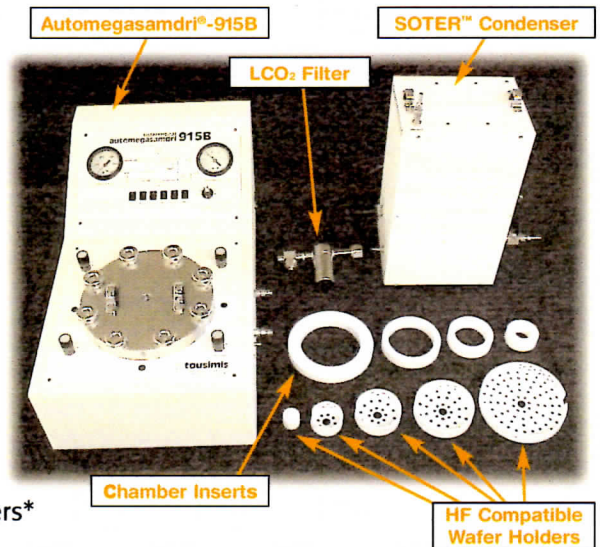

* Most Automegasamdri® feature U.S. patents (# 6,493,964, #6,678,968) or patents pending.

** Available for most countries. Contact tousimis® for details.

Note: Actual delivered model or accessories may vary slightly, as advancements are being constantly applied.